


SELECTING THE RIGHT VITON FLUOROELASTOMER MATERIAL TYPE - TOGOHK

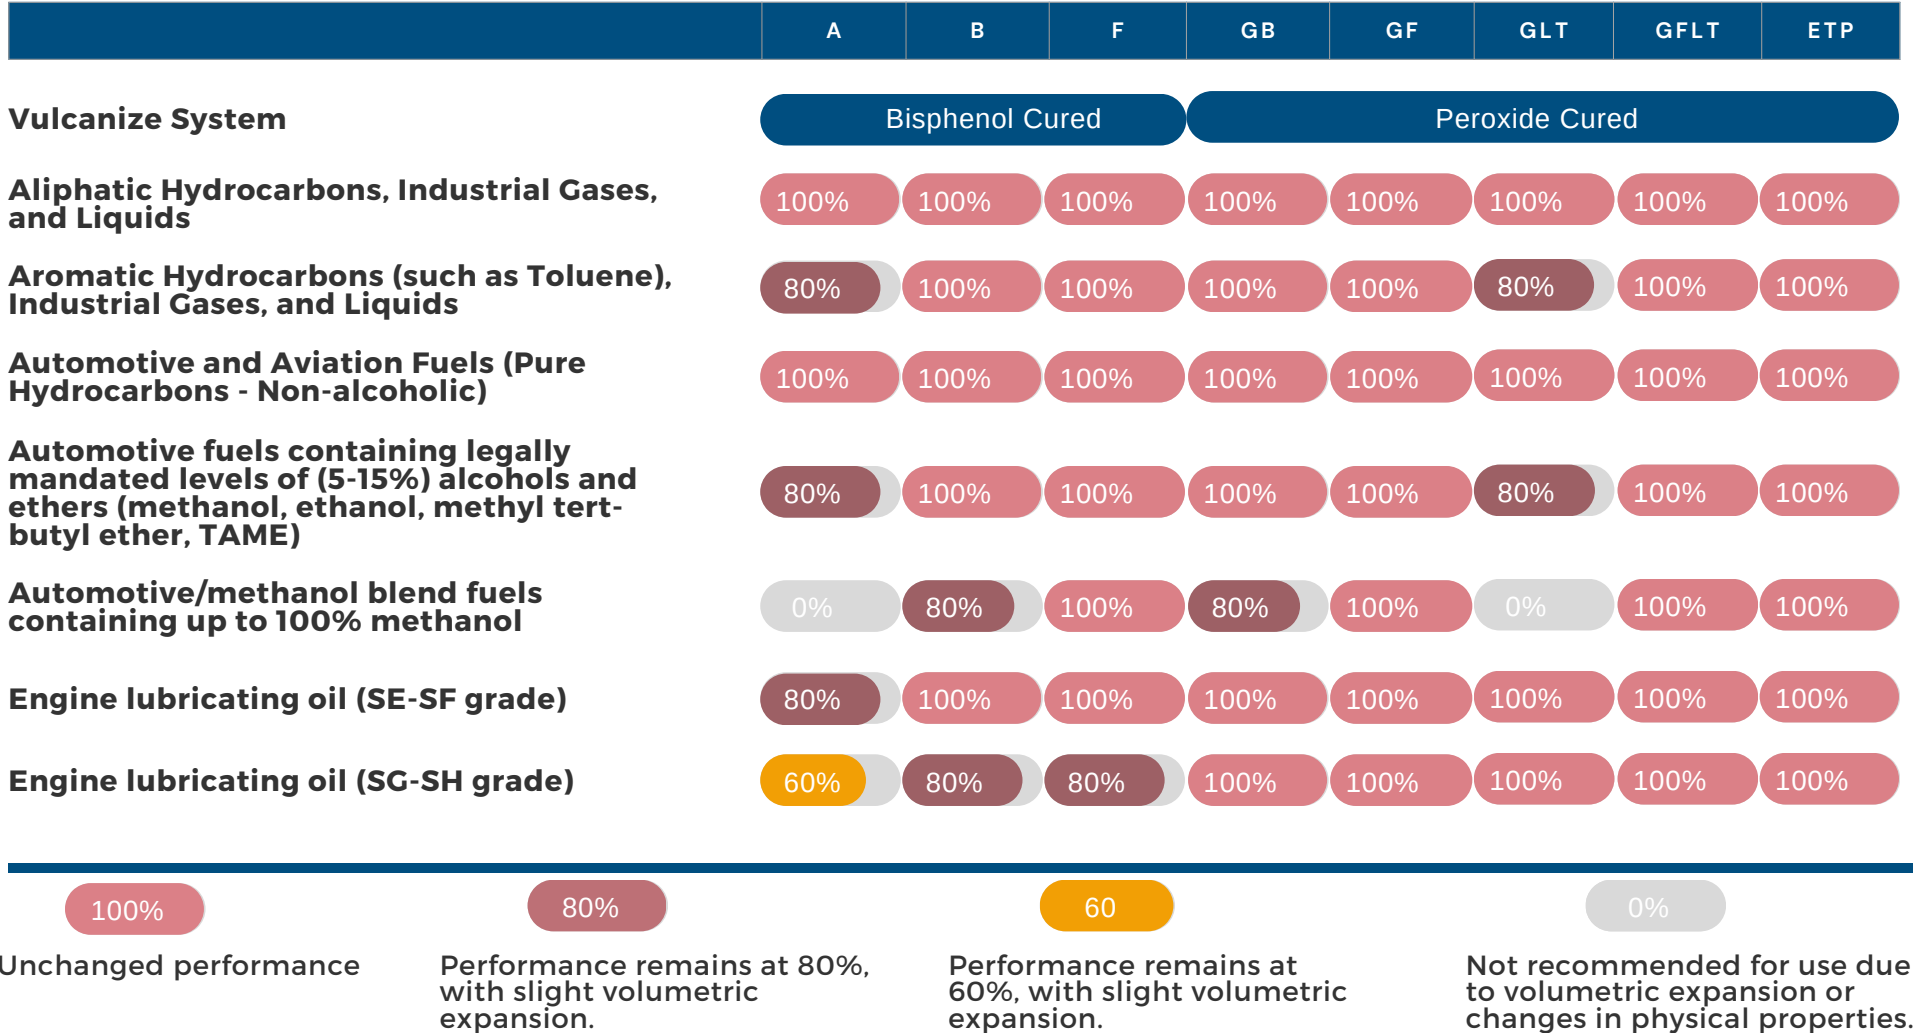

SELECTING THE RIGHT VITON FLUOROELASTOMER MATERIAL TYPE - TOGOHK

	A	B	F	GB	GF	GLT	GFLT	ETP
Vulcanize System	Bisphenol Cured			Peroxide Cured				
Acids (sulfuric acid, nitric acid), hot water, and steam	60%	80%	80%	100%	100%	100%	100%	100%
Strong alkalis, high pH values, and amines	0%	0%	0%	0%	0%	0%	0%	80%
Low molecular weight 100% concentration carbonization (MTBB, MBK, MIBK, etc.)	0%	0%	0%	0%	0%	0%	0%	80%
Shrinkage temperature (°C)	-17°C	-14°C	-7°C	-15°C	-6°C	-30°C	-24°C	-11°C

100%

Unchanged performance

80%

Performance remains at 80%, with slight volumetric expansion.

60

Performance remains at 60%, with slight volumetric expansion.

0%

Not recommended for use due to volumetric expansion or changes in physical properties.